



# FLEXFRAME® DOCK SHELTER

S P E C I F I C A T I O N S



## Design Highlights


- Side frames covered with white 18 oz. coated vinyl to transmit natural light into the loading area
- Overlapping layers of fabric provide more wear resistance against the sharp corners of the trailer, extending the life of the shelter
- Raked header permits weather drainage (flat header is used when shelter is protected by a hood or canopy)
- Roll-formed galvanized steel framing
- Fiberglass stays add stiffness to shelter face curtains

## Project Information

Job Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 General Contractor \_\_\_\_\_  
 Distributor \_\_\_\_\_  
 Quantity \_\_\_\_\_



## Certified For Construction

By \_\_\_\_\_  
 Company \_\_\_\_\_  
 Address \_\_\_\_\_  
 Date \_\_\_\_\_



# FLEXFRAME® DOCK SHELTER

## S P E C I F I C A T I O N S

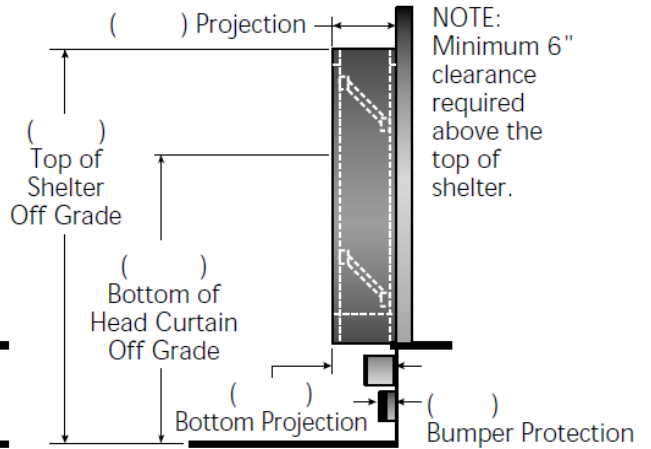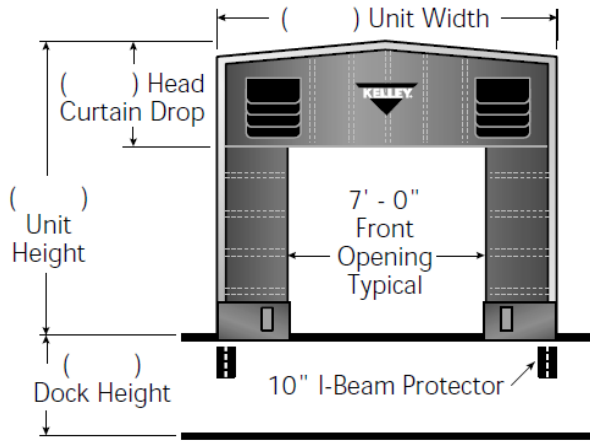

### APPLICATION DATA

Door Width: \_\_\_\_\_ ft. \_\_\_\_\_ in.

Door Height: \_\_\_\_\_ ft. \_\_\_\_\_ in.

Dock Height: \_\_\_\_\_ ft. \_\_\_\_\_ in.

Bumper Protection\*: \_\_\_\_\_ in.

(\*Includes bumper projection and any building wall/foundation offset or cantilever)

### TRUCKS AND TRAILERS SERVICED

Width: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Height: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Length: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Hydraulic Tailgate:  Yes  No

Rear Step Section:  Yes  No

Tailgate/Step Section Size: \_\_\_\_\_ In.

Yard Jockeys:  Yes  No

**Drive/Approach**  Level  Incline  Decline \_\_\_\_\_ % Grade

**Frame** Standard Galvanized Steel

**Building Wall Construction:**  Metal  Other

**Unit Width**  11'6"  12'0"

**Unit Height**  11'0"  11'6"  12'0"  12'6"

**Head Member Style**  Raked  Flat  45° Sloped

**Base Material**  TS-55®  40 oz. CSM  40 oz. Vinyl  22 oz. Vinyl

**Color**  Black  Tan  Brown  Blue  Green

**Head Curtain Drop**  30"  36"  42"  48"  54"  \_\_\_\_\_"

**Taper**  **Yes:** Projection Options:  18" Top/24" Bottom  24" Top/30" Bottom

24" Top/18" Bottom  30" Top/24" Bottom

**No:** Projection Choice:  18"  24"  30"  36"

**Options**  None  Door Numbers  Full Length Guide Stripes  Pull Rope Assembly

\*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)

